

Dual-Density Installation Guide

Sound Acoustic Solutions



1215 Valley Belt Road
Brooklyn Heights, OH 44131



+1 (877) 399-9697



info@soundacousticsolutions.com



www.soundacousticsolutions.com




Step 1: Clean the surface where your SilentFiber™ Dual-Density Boards are going to be installed.

Step 2: Add the 'BOSS-180' hanger adhesive to the backend of the perforated base hanger – enough to cover the surface of the hanger and flow through the perforated holes.

Step 3: Stick the hangers on the surface where the fiberglass will be installed.

Step 4: Place the SilentFiber™ Dual-Density board on top of the hangers, and press down gently – the nail end of the hanger should be protruding through the 100g mat face of the fiberglass board.

Step 5: Insert a dome cap on each exposed hanger nail, and press until firm in place.

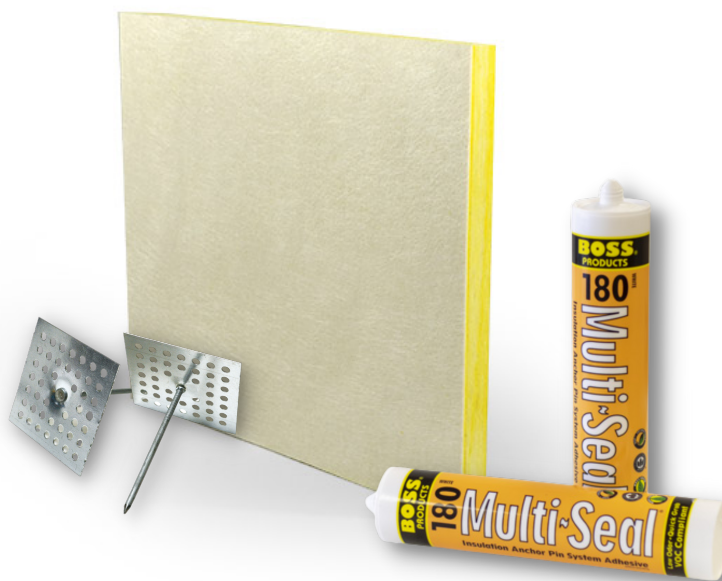

Have questions?

www.SoundAcousticSolutions.com

 info@SoundAcousticSolutions.com